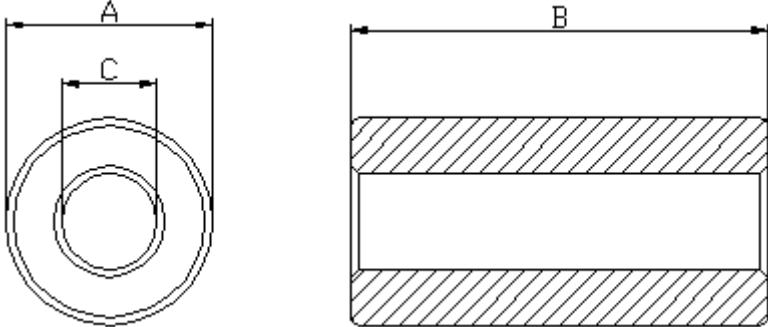


SPECIFICATION

ITEM : LF1258																																				
<p>(1).DIMENSION(Unit : m/m)</p> <div style="display: flex; justify-content: space-around; align-items: center;">  </div>		A	12.0±0.3	m/m																																
		B	20.0±0.5	m/m																																
		C	5.6±0.25	m/m																																
		D		m/m																																
		E		m/m																																
		F		m/m																																
		G		m/m																																
		H		m/m																																
		I		m/m																																
		<p>(2).ELECTRICAL REQUIREMENTS :</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">L</td> <td style="width: 15%;">uH mH</td> <td style="width: 15%;">TEST FREQ.</td> <td style="width: 15%;">KHZ MHZ</td> </tr> <tr> <td>Q</td> <td></td> <td>TEST FREQ.</td> <td>KHZ MHZ</td> </tr> <tr> <td>RDC</td> <td></td> <td></td> <td></td> </tr> <tr> <td>IDC</td> <td></td> <td></td> <td></td> </tr> <tr> <td>Z</td> <td>80 Min OHM</td> <td>TEST FREQ.</td> <td>25 MHZ</td> </tr> <tr> <td>Z</td> <td>110 Min OHM</td> <td>TEST FREQ.</td> <td>100 MHZ</td> </tr> <tr> <td>Z</td> <td>OHM</td> <td>TEST FREQ.</td> <td>MHZ</td> </tr> <tr> <td>Winding</td> <td colspan="3">0.8x100mm 2UEW 1Ts</td> </tr> </table>		L	uH mH	TEST FREQ.	KHZ MHZ	Q		TEST FREQ.	KHZ MHZ	RDC				IDC				Z	80 Min OHM	TEST FREQ.	25 MHZ	Z	110 Min OHM	TEST FREQ.	100 MHZ	Z	OHM	TEST FREQ.	MHZ	Winding	0.8x100mm 2UEW 1Ts			P
L	uH mH	TEST FREQ.	KHZ MHZ																																	
Q		TEST FREQ.	KHZ MHZ																																	
RDC																																				
IDC																																				
Z	80 Min OHM	TEST FREQ.	25 MHZ																																	
Z	110 Min OHM	TEST FREQ.	100 MHZ																																	
Z	OHM	TEST FREQ.	MHZ																																	
Winding	0.8x100mm 2UEW 1Ts																																			
		<p>(3)TEST INSTRUMENTS</p> <ul style="list-style-type: none"> <input type="checkbox"/>HP 4285A Q.METER <input type="checkbox"/>HP 4285A L.CR METER <input type="checkbox"/>LABORATORY DC POWER SUPPLY <input type="checkbox"/>DELICA DMC-230S DIP METER <input type="checkbox"/>DELICA DMC-470S DIP METER <input checked="" type="checkbox"/>HP 4291B RF IMPEDENCE ANALYZER 																																		

TEST DATA

TEMP.	23°C	RH	75%	SAMPLE NO.		
WIRE	0.8x100mm	WINDING	1Ts	Q 'TY	10pcs	
TEST INSTRUMENTS						
MEAS. ITEM	A mm	B mm	C mm			
Spec.						
	12±0.3	20±0.5	5.6±0.25			
TEST FREQ.						
1	12.02	20.00	5.68			
2	12.00	20.05	5.70			
3	12.01	20.06	5.65			
4	12.07	20.03	5.67			
5	12.07	20.00	5.67			
6	12.04	19.98	5.67			
7	12.01	20.02	5.71			
8	11.99	20.07	5.62			
9	12.06	20.12	5.68			
10	12.02	20.02	5.61			
\bar{X}	12.03	20.04	5.67			
R	0.08	0.14	0.10			

CABLE : 0.8x100mm 2UEW 1Ts
 TEST EQUIPMENT : AGILENT - 4291B
 FIXTURE : HP16092A
 PRINT TIME :
 TEST PARAMETER : |Z| (OHM)

TEST FREQ(MHZ)	1	5	10	25	50	100	200	300	400	500
SAMPLE 1	: 17	57	84	119	142	163	196	236	292	369
SAMPLE 2	: 16	54	79	116	142	166	201	244	304	382
SAMPLE 3	: 17	57	84	119	142	163	197	238	297	379
SAMPLE 4	: 16	54	79	116	141	164	199	241	300	381
SAMPLE 5	: 17	58	84	119	141	162	195	236	294	374
SAMPLE 6	: 17	57	84	118	141	162	196	238	298	380
SAMPLE 7	: 16	54	79	116	142	166	201	243	303	383
SAMPLE 8	: 16	54	80	116	142	165	200	242	301	384
SAMPLE 9	: 16	53	79	116	141	165	199	240	297	376
SAMPLE 10	: 16	54	80	116	142	165	200	243	302	387
AVERAGE	: 16	55	81	117	142	164	198	240	299	380

