

	T(N/m)	[Kg/cm]	N(rpm)	I(A)	Po(W)	EF(%)
No Load	0	0.00	160.00	.40	0	0
	.39	3.94	151.49	1.34	6.13	39.72
	1.16	11.84	134.61	3.22	16.36	44.06
	1.55	15.80	126.40	4.15	20.5	42.88
	1.94	19.74	118.01	5.10	23.91	40.7
	2.32	23.69	109.38	6.03	26.6	38.25
	2.71	27.62	101.04	6.98	28.64	35.62
	3.09	31.55	92.72	7.92	30.02	32.94
	3.87	39.45	75.77	9.79	30.68	27.18
	4.26	43.44	67.39	10.73	30.05	24.31
	4.64	47.38	58.90	11.67	28.64	21.31
	5.03	51.30	50.52	12.61	26.6	18.33
	5.42	55.31	42.12	13.54	23.91	15.34
	5.81	59.26	33.66	14.50	20.47	12.26
	6.19	63.16	25.26	15.43	16.37	9.2
	6.96	71.04	8.41	17.32	6.13	3.07
Stall	7.35	75.00	0.00	18.25	0	0
Po...(max)	3.48	35.53	84.29	8.85	30.74	30.17
EF...(max)	.77	7.89	143.05	2.28	11.58	44.07


參考 REF.
估價 EVALUATE
試作 INITIAL
製作 MASS

圖面歸檔
檔別
總號


汽車件 AUTO USE

零件圖 PART DRAWING
半成品圖 PART ASSEMBLY DRAWING
爆炸圖 EXPLODED DRAWING
組立圖 ASSEMBLY DRAWING

核准 APPROVED BY
核對 CHECKED BY
繪圖 DRAWN BY

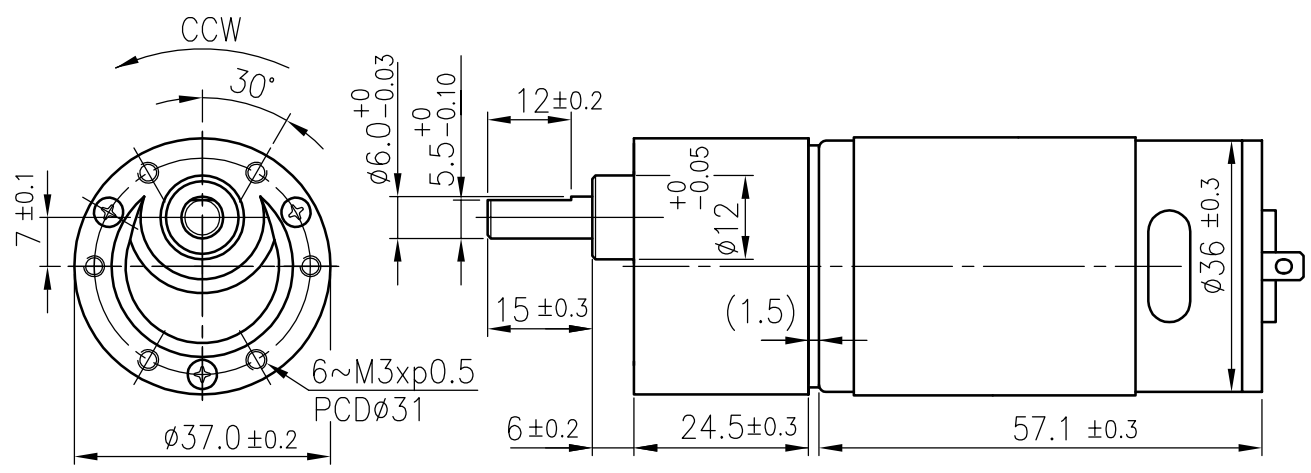

REDUCTION RATIO: 1/50
OUTPUT SHAFT: STEEL
MOTOR SPECIFICATION: 12V 8000RPM

一般公差表	軸徑 $\begin{matrix} 0 \\ - \end{matrix}$ 孔徑 $\begin{matrix} + \\ 0 \end{matrix}$ 長度, 角度 \pm -	1	新出圖							
	- 指定等級區分之數值公差									
	區分 等級	1~6	6~18	18~50	50~120	120~250	250~500	500~1000	角度	
	(1級)	0.1	0.2	0.3	0.4	0.5	0.6	0.8	1°	
	(2級)	0.2	0.4	0.6	0.8	1.2	1.6	2.0	2°	
	未標示孔徑距公差	±0.1			±0.2					
		設變單號 E.C.N.				設變單號 E.C.N.				
熱處理 HEAT TREATMENT		件名 PART NAME	GRARMOTOR						單位 UNITS	mm
表面處理 SURFACE		圖號 DWG.	RB350050-28B81R						比例 SCALE	1/1
材質 MATERIAL	ASS'Y		 祥儀企業股份有限公司 SHA YANG YE INDUSTRIAL CO., LTD.							
重量 WEIGHT	克(g)	頁次 SHEET	1/1							